
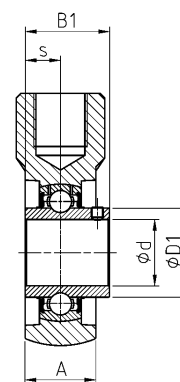
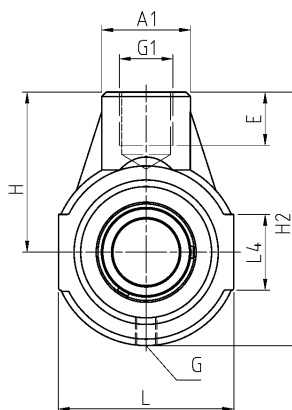


Hanger unit


Housing

EHE200 relubricatable




UCEHE200


Shaft diameter		Unit												Main dimensions [mm]	
d		H	L	H2	A	A1	L4	E	G1	s1	B	B1	s		
[mm]		-0,5													
12	UCEHE201	58	65	91	25	30	38	21	M16	-	-	31,0	12,7		
	USEHE201	58	65	91	25	30	38	21	M16	-	-	22,0	6,0		
	ESEHE201	58	65	91	25	30	38	21	M16	-	-	28,6	6,5		
	EXEHE201	58	65	91	25	30	38	21	M16	-	-	43,5	17,0		
15	UCEHE202	58	65	91	25	30	38	21	M16	-	-	31,0	12,7		
	USEHE202	58	65	91	25	30	38	21	M16	-	-	22,0	6,0		
	ESEHE202	58	65	91	25	30	38	21	M16	-	-	28,6	6,5		
	EXEHE202	58	65	91	25	30	38	21	M16	-	-	43,5	17,0		
17	UCEHE203	58	65	91	25	30	38	21	M16	-	-	31,0	12,7		
	USEHE203	58	65	91	25	30	38	21	M16	-	-	22,0	6,0		
	ESEHE203	58	65	91	25	30	38	21	M16	-	-	28,6	6,5		
	EXEHE203	58	65	91	25	30	38	21	M16	-	-	43,5	17,0		
20	UCEHE204	58	65	91	25	30	38	21	M16	-	-	31,0	12,7		
	USEHE204	58	65	91	25	30	38	21	M16	-	-	25,0	7,0		
	ESEHE204	58	65	91	25	30	38	21	M16	-	-	30,9	7,5		
	EXEHE204	58	65	91	25	30	38	21	M16	-	-	43,5	17,0		
	UKEHE205H	64	70	99	28	35	38	22	M20	18,5	35,0	-	-		
25	UCEHE205	64	70	99	28	35	38	22	M20	-	-	34,0	14,3		
	USEHE205	64	70	99	28	35	38	22	M20	-	-	27,0	7,5		
	ESEHE205	64	70	99	28	35	38	22	M20	-	-	30,9	7,5		
	EXEHE205	64	70	99	28	35	38	22	M20	-	-	44,3	17,4		
	UKEHE206H	72	85	114	32	40	40	24	M24	20,5	38,0	-	-		
30	UCEHE206	72	85	114	32	40	40	24	M24	-	-	38,1	15,9		
	USEHE206	72	85	114	32	40	40	24	M24	-	-	30,0	8,0		
	ESEHE206	72	85	114	32	40	40	24	M24	-	-	35,7	9,0		
	EXEHE206	72	85	114	32	40	40	24	M24	-	-	48,3	18,2		
	UKEHE207H	76	90	122	32	40	40	24	M24	22,5	43,0	-	-		
35	UCEHE207	76	90	122	32	40	40	24	M24	-	-	42,9	17,5		
	USEHE207	76	90	122	32	40	40	24	M24	-	-	32,0	8,5		
	ESEHE207	76	90	122	32	40	40	24	M24	-	-	38,9	9,5		
	EXEHE207	76	90	122	32	40	40	24	M24	-	-	51,1	18,8		
	UKEHE208H	85	100	135	36	40	45	24	M24	24,5	46,0	-	-		
40	UCEHE208	85	100	135	36	40	45	24	M24	-	-	49,2	19,0		
	USEHE208	85	100	135	36	40	45	24	M24	-	-	34,0	9,0		
	ESEHE208	85	100	135	36	40	45	24	M24	-	-	43,7	11,0		
	EXEHE208	85	100	135	36	40	45	24	M24	-	-	56,3	21,4		
	UKEHE209H	90	110	145	40	40	45	24	M24	26,0	50,0	-	-		

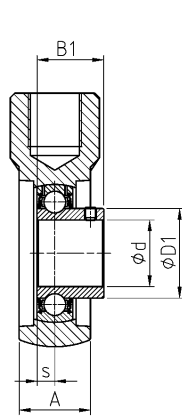


USEHE200

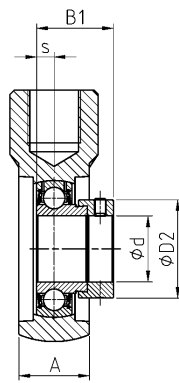

ESEHE200

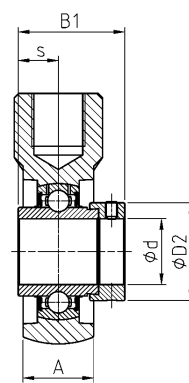

EXEHE200






UKEHE200H

D1	D2	G	Housing		Bearing insert	Dynamic load rating	Static load rating	Weight	Shaft diameter
						C_r [kN]	C_{or} [kN]	[kg]	d [mm]
29,0	-	R1/8"	EHE204	UC201		12,80	6,65	0,8	12
24,6	-	M6x1	EHE203	US201		9,55	4,78	0,4	
-	28,6	M6x1	EHE203	ES201		9,55	4,78	0,5	
-	33,3	R1/8"	EHE204	EX201		12,80	6,65	0,8	
29,0	-	R1/8"	EHE204	UC202		12,80	6,65	0,8	15
24,6	-	M6x1	EHE203	US202		9,55	4,78	0,4	
-	28,6	M6x1	EHE203	ES202		9,55	4,78	0,5	
-	33,3	R1/8"	EHE204	EX202		12,80	6,65	0,8	
29,0	-	R1/8"	EHE204	UC203		12,80	6,65	0,5	17
24,6	-	M6x1	EHE203	US203		9,55	4,78	0,5	
-	28,6	M6x1	EHE203	ES203		9,55	4,78	0,5	
-	33,3	R1/8"	EHE204	EX203		12,80	6,65	0,8	
29,0	-	R1/8"	EHE204	UC204		12,80	6,65	0,7	20
29,0	-	R1/8"	EHE204	US204		12,80	6,65	0,7	
-	33,3	R1/8"	EHE204	ES204		12,80	6,65	0,7	
-	33,3	R1/8"	EHE204	EX204		12,80	6,65	0,8	
-	38,0	R1/8"	EHE205	UK205 + H2305		14,00	7,88	1,2	
34,0	-	R1/8"	EHE205	UC205		14,00	7,88	1,2	25
34,0	-	R1/8"	EHE205	US205		14,00	7,88	1,1	
-	38,1	R1/8"	EHE205	ES205		14,00	7,88	1,1	
-	38,1	R1/8"	EHE205	EX205		14,00	7,88	1,2	
-	45,0	R1/8"	EHE206	UK206 + H2306		19,50	11,20	1,4	
40,3	-	R1/8"	EHE206	UC206		19,50	11,20	1,3	30
40,3	-	R1/8"	EHE206	US206		19,50	11,20	1,3	
-	44,5	R1/8"	EHE206	ES206		19,50	11,20	1,3	
-	44,5	R1/8"	EHE206	EX206		19,50	11,20	1,4	
-	52,0	R1/8"	EHE207	UK207 + H2307		25,70	15,20	1,6	
48,0	-	R1/8"	EHE207	UC207		25,70	15,20	1,6	35
48,0	-	R1/8"	EHE207	US207		25,70	15,20	1,5	
-	55,6	R1/8"	EHE207	ES207		25,70	15,20	1,6	
-	55,6	R1/8"	EHE207	EX207		25,70	15,20	1,7	
-	58,0	R1/8"	EHE208	UK208 + H2308		29,60	18,20	1,9	
53,0	-	R1/8"	EHE208	UC208		29,60	18,20	1,8	40
53,0	-	R1/8"	EHE208	US208		29,60	18,20	1,8	
-	60,3	R1/8"	EHE208	ES208		29,60	18,20	1,9	
-	60,3	R1/8"	EHE208	EX208		29,60	18,20	2,0	
-	65,0	R1/8"	EHE209	UK209 + H2309		31,85	20,80	2,0	

Hanger unit


Housing

EHE200 relubricatable

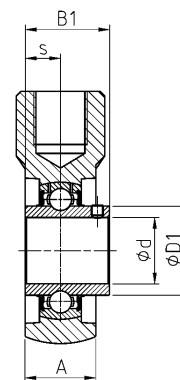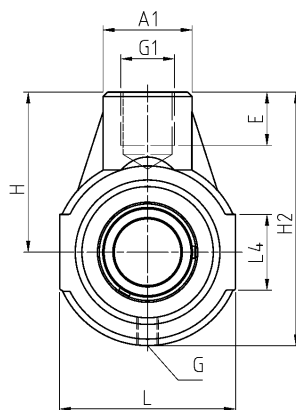


UCEHE200


Shaft diameter		Main dimensions [mm]											
d [mm]	Unit	H	L	H2	A	A1	L4	E	G1	s1	B	B1	s
		-0,5											
45	UCEHE209	90	110	145	40	40	45	24	M24	-	-	49,2	19,0
	USEHE209	90	110	145	40	40	45	24	M24	-	-	41,2	10,2
	ESEHE209	90	110	145	40	40	45	24	M24	-	-	43,7	11,0
	EXEHE209	90	110	145	40	40	45	24	M24	-	-	56,3	21,4
	UKEHE210H	90	110	145	40	40	46	24	M24	27,5	55,0	-	-
50	UCEHE210	90	110	145	40	40	46	24	M24	-	-	51,6	19,0
	USEHE210	90	110	145	40	40	46	24	M24	-	-	43,5	10,9
	ESEHE210	90	110	145	40	40	46	24	M24	-	-	43,7	11,0
	EXEHE210	90	110	145	40	40	46	24	M24	-	-	62,7	24,6

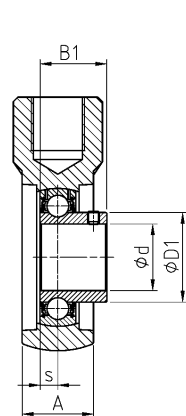


USEHE200

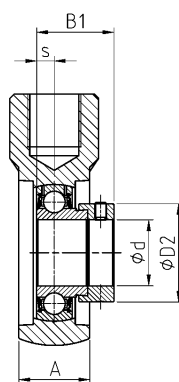

ESEHE200

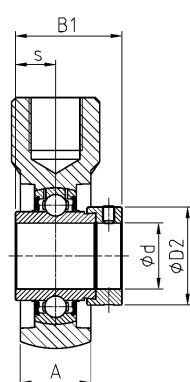

EXEHE200

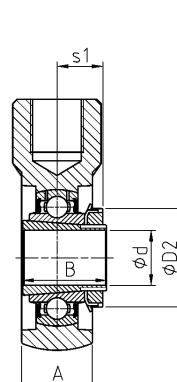

UKEHE200H

D1	D2	G	Housing		Bearing insert	Dynamic load rating	Static load rating	Weight	Shaft diameter
						C_r [kN]	C_{Or} [kN]	[kg]	d [mm]
57,2	-	R1/8"	EHE209	UC209		31,85	20,80	1,9	45
57,2	-	R1/8"	EHE209	US209		31,85	20,80	1,9	
-	63,5	R1/8"	EHE209	ES209		31,85	20,80	1,9	
-	63,5	R1/8"	EHE209	EX209		31,85	20,80	2,1	
-	70,0	R1/8"	EHE210	UK210 + H2310		35,10	23,20	2,2	
61,8	-	R1/8"	EHE210	UC210		35,10	23,20	2,0	50
61,8	-	R1/8"	EHE210	US210		35,10	23,20	2,0	
-	69,9	R1/8"	EHE210	ES210		35,10	23,20	2,0	
-	69,9	R1/8"	EHE210	EX210		35,10	23,20	2,2	