
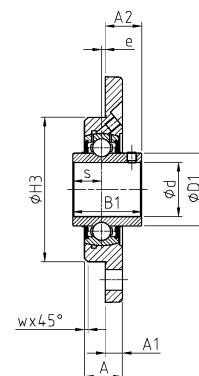
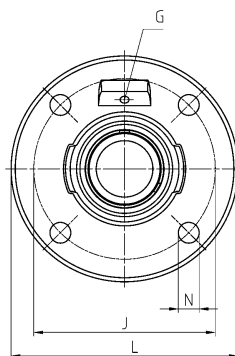


Flanged unit


Housing

FCE200 relubricatable




UCFCE200


Shaft diameter Unit		Main dimensions [mm]											
d [mm]		L	J	A	A1	A2	W	H3 h8	e	N	s1	B	B1
12	UCFCE201	100	78	18,0	8,0	16,3	2	62	2,0	9,0	-	-	31,0
	USFCE201	100	78	18,0	8,0	14,0	2	62	2,0	9,0	-	-	22,0
	ESFCE201	100	78	18,0	8,0	20,1	2	62	2,0	9,0	-	-	28,6
	EXFCE201	100	78	18,0	8,0	24,5	2	62	2,0	9,0	-	-	43,5
15	UCFCE202	100	78	18,0	8,0	16,3	2	62	2,0	9,0	-	-	31,0
	USFCE202	100	78	18,0	8,0	14,0	2	62	2,0	9,0	-	-	22,0
	ESFCE202	100	78	18,0	8,0	20,1	2	62	2,0	9,0	-	-	28,6
	EXFCE202	100	78	18,0	8,0	24,5	2	62	2,0	9,0	-	-	43,5
17	UCFCE203	100	78	18,0	8,0	16,3	2	62	2,0	9,0	-	-	31,0
	USFCE203	100	78	18,0	8,0	14,0	2	62	2,0	9,0	-	-	22,0
	ESFCE203	100	78	18,0	8,0	20,1	2	62	2,0	9,0	-	-	28,6
	EXFCE203	100	78	18,0	8,0	24,5	2	62	2,0	9,0	-	-	43,5
20	UCFCE204	100	78	18,0	8,0	16,3	2	62	2,0	9,0	-	-	31,0
	USFCE204	100	78	18,0	8,0	16,0	2	62	2,0	9,0	-	-	25,0
	ESFCE204	100	78	18,0	8,0	21,4	2	62	2,0	9,0	-	-	30,9
	EXFCE204	100	78	18,0	8,0	24,5	2	62	2,0	9,0	-	-	43,5
	UKFCE205H	115	90	20,0	9,0	21,0	2	70	2,5	9,0	18,5	35,0	-
25	UCFCE205	115	90	20,0	9,0	17,2	2	70	2,5	9,0	-	-	34,0
	USFCE205	115	90	20,0	9,0	17,0	2	70	2,5	9,0	-	-	27,0
	ESFCE205	115	90	20,0	9,0	20,9	2	70	2,5	9,0	-	-	30,9
	EXFCE205	115	90	20,0	9,0	24,4	2	70	2,5	9,0	-	-	44,3
	UKFCE206H	125	100	21,0	9,5	22,5	2	80	2,0	11,5	20,5	38,0	-
30	UCFCE206	125	100	21,0	9,5	20,2	2	80	2,0	11,5	-	-	38,1
	USFCE206	125	100	21,0	9,5	20,0	2	80	2,0	11,5	-	-	30,0
	ESFCE206	125	100	21,0	9,5	24,7	2	80	2,0	11,5	-	-	35,7
	EXFCE206	125	100	21,0	9,5	28,1	2	80	2,0	11,5	-	-	48,3
	UKFCE207H	135	110	21,0	10,0	23,5	2	90	1,0	11,5	22,5	43,0	-
35	UCFCE207	135	110	21,0	10,0	24,4	2	90	1,0	11,5	-	-	42,9
	USFCE207	135	110	21,0	10,0	22,5	2	90	1,0	11,5	-	-	32,0
	ESFCE207	135	110	21,0	10,0	28,4	2	90	1,0	11,5	-	-	38,9
	EXFCE207	135	110	21,0	10,0	31,3	2	90	1,0	11,5	-	-	51,1
	UKFCE208H	145	120	23,0	11,5	25,5	2	100	1,0	11,5	24,5	46,0	-
40	UCFCE208	145	120	23,0	11,5	29,2	2	100	1,0	11,5	-	-	49,2
	USFCE208	145	120	23,0	11,5	24,0	2	100	1,0	11,5	-	-	34,0
	ESFCE208	145	120	23,0	11,5	31,7	2	100	1,0	11,5	-	-	43,7
	EXFCE208	145	120	23,0	11,5	33,9	2	100	1,0	11,5	-	-	56,3
	UKFCE209H	155	130	25,0	12,0	28,0	2	105	2,0	14,0	26,0	50,0	-

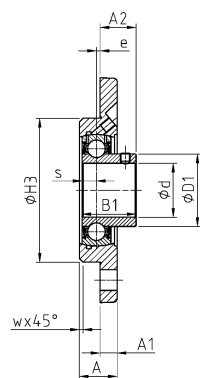


USFCE200

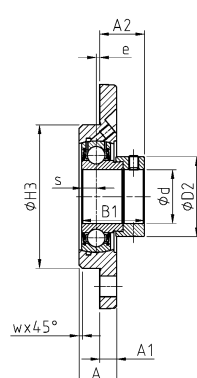

ESFCE200

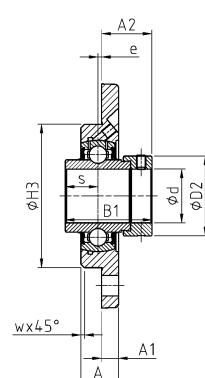

EXFCE200

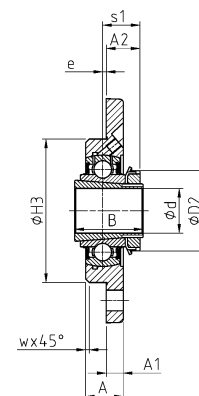




UKFCE200H

				Housing	Bearing insert	Dynamic load rating	Static load rating	Weight	Shaft diameter
s	D1	D2	G			C _r [kN]	C _{0r} [kN]	[kg]	d [mm]
12,7	29,0	-	M6x1	FCE204	UC201	12,80	6,65	0,6	12
6,0	24,6	-	M6x1	FCE203	US201	9,55	4,78	0,5	
6,5	-	28,6	M6x1	FCE203	ES201	9,55	4,78	0,5	
17,0	-	33,3	M6x1	FCE204	EX201	12,80	6,65	0,7	
12,7	29,0	-	M6x1	FCE204	UC202	12,80	6,65	0,6	15
6,0	24,6	-	M6x1	FCE203	US202	9,55	4,78	0,5	
6,5	-	28,6	M6x1	FCE203	ES202	9,55	4,78	0,5	
17,0	-	33,3	M6x1	FCE204	EX202	12,80	6,65	0,6	
12,7	29,0	-	M6x1	FCE204	UC203	12,80	6,65	0,6	17
6,0	24,6	-	M6x1	FCE203	US203	9,55	4,78	0,5	
6,5	-	28,6	M6x1	FCE203	ES203	9,55	4,78	0,5	
17,0	-	33,3	M6x1	FCE204	EX203	12,80	6,65	0,6	
12,7	29,0	-	M6x1	FCE204	UC204	12,80	6,65	0,5	20
7,0	29,0	-	M6x1	FCE204	US204	12,80	6,65	0,5	
7,5	-	33,3	M6x1	FCE204	ES204	12,80	6,65	0,5	
17,0	-	33,3	M6x1	FCE204	EX204	12,80	6,65	0,6	
-	-	38,0	M6x1	FCE205	UK205 + H2305	14,00	7,88	0,8	25
14,3	34,0	-	M6x1	FCE205	UC205	14,00	7,88	0,8	
7,5	34,0	-	M6x1	FCE205	US205	14,00	7,88	0,8	
7,5	-	38,1	M6x1	FCE205	ES205	14,00	7,88	0,8	
17,4	-	38,1	M6x1	FCE205	EX205	14,00	7,88	0,8	30
-	-	45,0	M6x1	FCE206	UK206 + H2306	19,50	11,20	1,0	
15,9	40,3	-	M6x1	FCE206	UC206	19,50	11,20	1,0	
8,0	40,3	-	M6x1	FCE206	US206	19,50	11,20	0,9	
9,0	-	44,5	M6x1	FCE206	ES206	19,50	11,20	1,0	35
18,2	-	44,5	M6x1	FCE206	EX206	19,50	11,20	1,1	
-	-	52,0	M6x1	FCE207	UK207 + H2307	25,70	15,20	1,3	
17,5	48,0	-	M6x1	FCE207	UC207	25,70	15,20	1,2	
8,5	48,0	-	M6x1	FCE207	US207	25,70	15,20	1,2	40
9,5	-	55,6	M6x1	FCE207	ES207	25,70	15,20	1,3	
18,8	-	55,6	M6x1	FCE207	EX207	25,70	15,20	1,4	
-	-	58,0	M6x1	FCE208	UK208 + H2308	29,60	18,20	1,7	
19,0	53,0	-	M6x1	FCE208	UC208	29,60	18,20	1,6	40
9,0	53,0	-	M6x1	FCE208	US208	29,60	18,20	1,6	
11,0	-	60,3	M6x1	FCE208	ES208	29,60	18,20	1,7	
21,4	-	60,3	M6x1	FCE208	EX208	29,60	18,20	1,8	
-	-	65,0	M6x1	FCE209	UK209 + H2309	31,85	20,80	2,0	

Flanged unit


Housing

FCE200 relubricatable

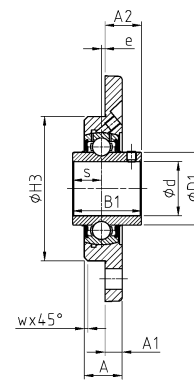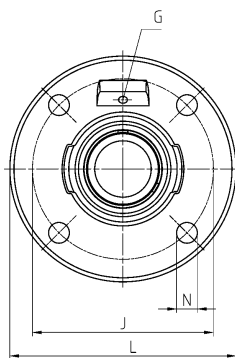


UCFCE200


Shaft diameter Unit		Main dimensions [mm]												
d [mm]		L	J	A	A1	A2	W	H3 h8	e	N	s1	B	B1	
45	UCFCE209	155	130	25,0	12,0	28,2	2	105	2,0	14,0	-	-	49,2	
	USFCE209	155	130	25,0	12,0	29,0	2	105	2,0	14,0	-	-	41,2	
	ESFCE209	155	130	25,0	12,0	30,7	2	105	2,0	14,0	-	-	43,7	
	EXFCE209	155	130	25,0	12,0	32,9	2	105	2,0	14,0	-	-	56,3	
	UKFCE210H	165	135	25,5	13,0	28,5	3	110	1,0	14,0	27,5	55,0	-	
50	UCFCE210	165	135	25,5	13,0	31,6	3	110	1,0	14,0	-	-	51,6	
	USFCE210	165	135	25,5	13,0	31,6	3	110	1,0	14,0	-	-	43,5	
	ESFCE210	165	135	25,5	13,0	31,7	3	110	1,0	14,0	-	-	43,7	
	EXFCE210	165	135	25,5	13,0	37,1	3	110	1,0	14,0	-	-	62,7	
	UKFCE211H	185	150	27,5	15,0	29,0	3	125	0,0	18,0	29,0	59,0	-	
55	UCFCE211	185	150	27,5	15,0	33,4	3	125	0,0	18,0	-	-	55,6	
	USFCE211	185	150	27,5	15,0	33,5	3	125	0,0	18,0	-	-	45,3	
	ESFCE211	185	150	27,5	15,0	36,4	3	125	0,0	18,0	-	-	48,4	
	EXFCE211	185	150	27,5	15,0	43,6	3	125	0,0	18,0	-	-	71,3	
	UKFCE212H	195	160	30,5	16,0	32,0	3	135	1,0	18,0	31,0	62,0	-	
60	UCFCE212	195	160	30,5	16,0	38,7	3	135	1,0	18,0	-	-	65,1	
	USFCE212	195	160	30,5	16,0	37,8	3	135	1,0	18,0	-	-	53,7	
	ESFCE212	195	160	30,5	16,0	36,3	3	135	1,0	18,0	-	-	49,3	
	EXFCE212	195	160	30,5	16,0	45,8	3	135	1,0	18,0	-	-	77,7	
	UKFCE213H	215	177	33,0	18,0	32,0	6	150	0,0	18,0	32,0	65,0	-	
65	UCFCE213	215	177	33,0	18,0	39,7	6	150	0,0	18,0	-	-	65,1	
	EXFCE213	215	177	33,0	18,0	51,6	6	150	0,0	18,0	-	-	85,7	
	UKFCE215H	215	177	33,0	18,0	35,5	6	150	0,0	18,0	35,5	73,0	-	
70	UCFCE214	215	177	33,0	18,0	44,4	6	150	0,0	18,0	-	-	74,6	
	EXFCE214	215	177	33,0	18,0	51,6	6	150	0,0	18,0	-	-	85,7	
	UKFCE216H	220	184	33,0	18,5	37,0	6	160	-2,0	18,0	39,0	78,0	-	
75	UCFCE215	220	184	33,0	18,0	44,5	6	160	0,0	18,0	-	-	77,8	
	EXFCE215	220	184	33,0	18,0	54,8	6	160	0,0	18,0	-	-	92,1	
80	UCFCE216	220	184	33,0	18,5	51,3	6	160	-2,0	18,0	-	-	82,6	
	EXFCE216	220	184	33,0	18,5	59,9	6	160	-2,0	18,0	-	-	95,2	
	UKFCE218H	265	220	37,0	22,5	38,0	3	190	-4,0	23,0	42,0	86,0	-	
90	UCFCE218	265	220	37,0	22,5	60,3	3	190	-4,0	23,0	-	-	96,0	
	EXFCE218	265	220	37,0	22,5	50,5	3	190	-4,0	23,0	-	-	72,5	

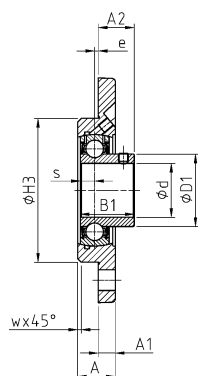


USFCE200

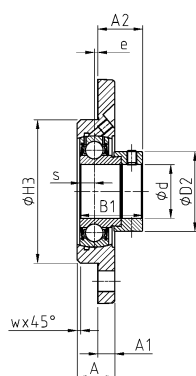

ESFCE200

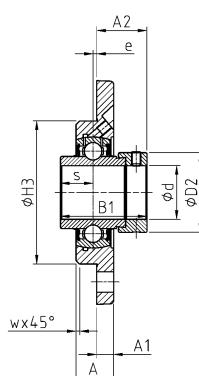

EXFCE200

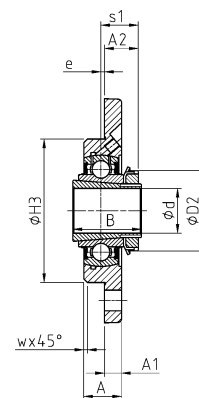

UKFCE200H

				Housing		Bearing insert	Dynamic load rating	Static load rating	Weight	Shaft diameter
s	D1	D2	G				C_r [kN]	C_{0r} [kN]	[kg]	d [mm]
19,0	57,2	-	M6x1	FCE209	UC209		31,85	20,80	1,9	45
10,2	57,2	-	M6x1	FCE209	US209		31,85	20,80	1,8	
11,0	-	63,5	M6x1	FCE209	ES209		31,85	20,80	1,9	
21,4	-	63,5	M6x1	FCE209	EX209		31,85	20,80	2,1	
-	-	70,0	M8x1	FCE210	UK210 + H2310		35,10	23,20	2,4	
19,0	61,8	-	M8x1	FCE210	UC210		35,10	23,20	2,2	50
10,9	61,8	-	M8x1	FCE210	US210		35,10	23,20	2,2	
11,0	-	69,9	M8x1	FCE210	ES210		35,10	23,20	2,2	
24,6	-	69,9	M8x1	FCE210	EX210		35,10	23,20	2,4	
-	-	75,0	M6x1	FCE211	UK211 + H2311		43,55	29,20	3,2	
22,2	69,0	-	M6x1	FCE211	UC211		43,55	29,20	3,1	55
11,8	69,0	-	M6x1	FCE211	US211		43,55	29,20	3,1	
12,0	-	76,2	M6x1	FCE211	ES211		43,55	29,20	2,9	
27,7	-	76,2	M6x1	FCE211	EX211		43,55	29,20	3,4	
-	-	80,0	R1/8"	FCE212	UK212 + H2312		52,50	32,80	3,9	
25,4	74,9	-	R1/8"	FCE212	UC212		52,50	32,80	3,9	60
14,9	74,9	-	R1/8"	FCE212	US212		52,50	32,80	3,7	
12,0	-	84,2	R1/8"	FCE212	ES212		52,50	32,80	3,6	
30,9	-	84,2	R1/8"	FCE212	EX212		52,50	32,80	4,2	
-	-	85,0	R1/8"	FCE213	UK213 + H2313		57,20	40,00	5,0	
25,4	82,0	-	R1/8"	FCE213	UC213		57,20	40,00	4,9	65
34,1	-	86,0	R1/8"	FCE213	EX213		57,20	40,00	5,5	
-	-	98,0	R1/8"	FCE215	UK215 + H2315		66,00	49,50	5,8	
30,2	86,5	-	R1/8"	FCE214	UC214		62,00	45,00	5,1	70
34,1	-	96,8	R1/8"	FCE214	EX214		62,00	45,00	5,6	
-	-	105,0	R1/8"	FCE216	UK216 + H2316		72,50	54,20	6,1	
33,3	91,5	-	R1/8"	FCE215	UC215		66,00	49,50	5,5	75
37,3	-	102,0	R1/8"	FCE215	EX215		66,00	49,50	6,1	
33,3	98,0	-	R1/8"	FCE216	UC216		72,50	54,20	5,6	80
37,3	-	110,0	R1/8"	FCE216	EX216		72,50	54,20	5,9	
-	-	120,0	R1/8"	FCE218	UK218 + H2318		96,00	71,50	9,8	
39,7	111,0	-	R1/8"	FCE218	UC218		96,00	71,50	9,6	90
24,5	-	120,0	R1/8"	FCE218	EX218		96,00	71,50	10,0	