

BOE-THERM

*Your reliable
partner in
Temperature
Control Units*

TEMP 140 S

Pressurized-water temperature control unit up to 140 °C


- ❖ Magnetic driven pump
- ❖ High efficient cooling
- ❖ Easy operation
- ❖ Low noise



BOE-THERM

TEMP 140 S

Equipment:	Standard	Optional
Automatic restart	●	
Solid State Relais	●	
Temperature deviation alarm	●	
Automatic water refilling	●	
Leakage control during operation	●	
Pressure relief after stop		●
Mould draining		●
Automatic cool down function	●	
Flow measuring Vortex		●
Connection for external PT 100 sensor		●
Service indicator (hour counter)	●	
Serial interface 20 mA CL		●
Analog interface 4-20 mA		●
Profibus		●
Ethernet/IP		●
Profinet		●
Devicenet		●

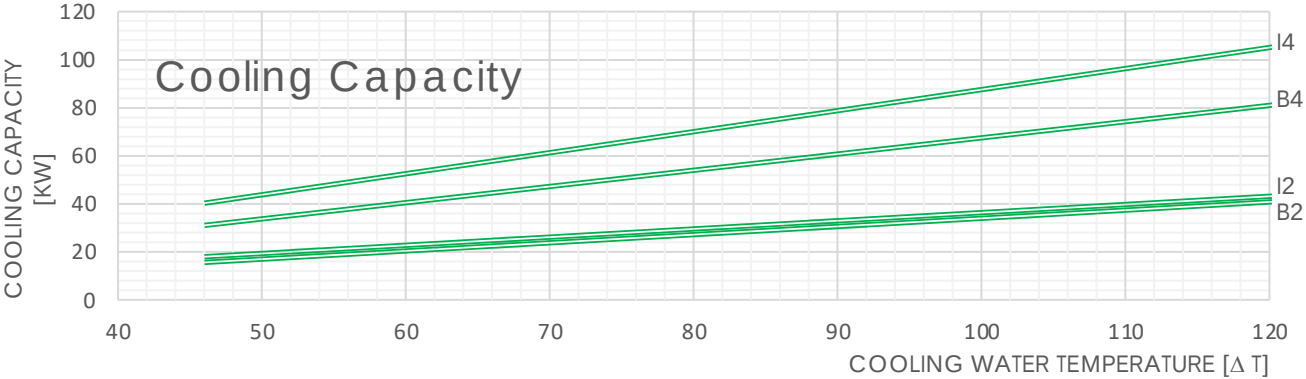

Technical Specifications:				
Max outlet temperature	140 °C			
Heating capacity	4,5 kW (opt. 9 - 13,5 - 18kW)			
Heat transfer fluid	Water			
Tank volumen	6 Liter			
Pump	std.			
Type	Q4	Q5		
Flow rate max. l/min	40	60		
Pressure max. Bar	5	6,0		
Cooling capacity at ΔT = 120 °C	std.			
Type	I2	I4	B2	B4
kW	44	106	41	81
Connections in/out	1/2"			
Operating voltage std.	3x400V/50Hz - 3x460V/60Hz			
Dimensions (L x W x H)	680 x 270 x 640 mm			