
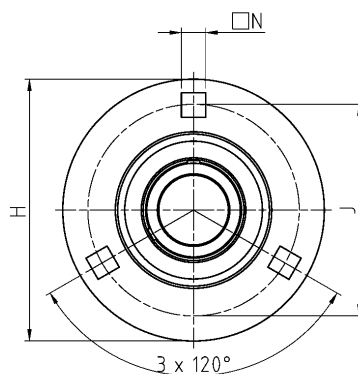



Flanged unit

Housing

PF200




PF203...207

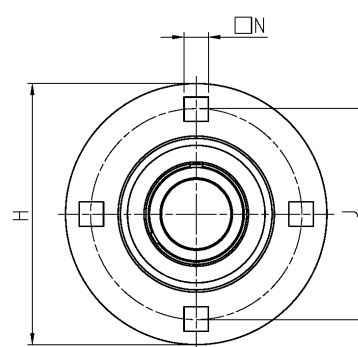


PF208...212

Shaft diameter		Main dimensions [mm]							
Unit		H	J	J2	A	A1	N	B1	s
d	[mm]								
12	USPF201	81,0	63,5	49,0	6,7	4,0	7,1	22,0	6,0
	ESPF201	81,0	63,5	49,0	6,7	4,0	7,1	28,6	6,5
15	USPF202	81,0	63,5	49,0	6,7	4,0	7,1	22,0	6,0
	ESPF202	81,0	63,5	49,0	6,7	4,0	7,1	28,6	6,5
17	USPF203	81,0	63,5	49,0	6,7	4,0	7,1	22,0	6,0
	ESPF203	81,0	63,5	49,0	6,7	4,0	7,1	28,6	6,5
20	USPF204	90,5	71,5	55,0	7,7	4,0	8,7	25,0	7,0
	ESPF204	90,5	71,5	55,0	7,7	4,0	8,7	30,9	7,5
25	USPF205	95,2	76,0	60,0	8,7	4,0	8,7	27,0	7,5
	ESPF205	95,2	76,0	60,0	8,7	4,0	8,7	30,9	7,5
30	USPF206	112,7	90,5	71,0	9,0	5,0	10,5	30,0	8,0
	ESPF206	112,7	90,5	71,0	9,0	5,0	10,5	35,7	9,0
35	USPF207	122,2	100,0	81,0	10,0	5,0	10,5	32,0	8,5
	ESPF207	122,2	100,0	81,0	10,0	5,0	10,5	38,9	9,5
40	USPF208	147,8	119,0	91,0	10,0	7,0	13,5	34,0	9,0
	ESPF208	147,8	119,0	91,0	10,0	7,0	13,5	43,7	11,0
45	USPF209	149,2	120,5	97,0	10,0	7,0	13,5	41,2	10,2
	ESPF209	149,2	120,5	97,0	10,0	7,0	13,5	43,7	11,0
50	USPF210	155,6	127,0	102,0	10,5	8,0	13,5	43,5	10,9
	ESPF210	155,6	127,0	102,0	10,5	8,0	13,5	43,7	11,0
55	USPF211	166,6	138,0	113,0	10,7	8,0	13,5	45,3	11,8
	ESPF211	166,6	138,0	113,0	10,7	8,0	13,5	48,4	12,0
60	USPF212	176,2	147,6	122,0	11,9	8,0	13,5	53,7	14,9
	ESPF212	176,2	147,6	122,0	11,9	8,0	13,5	49,3	12,0

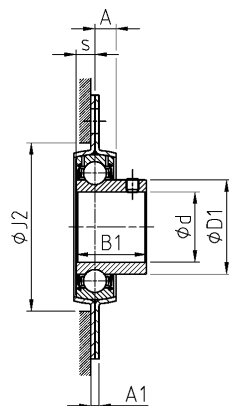

USPF200

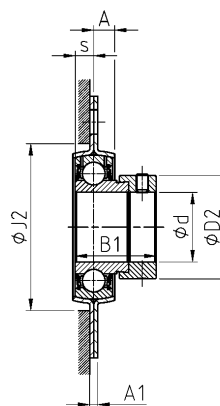

ESPF200

		Housing		Bearing insert		Dynamic load rating		Static load rating		Weight		Shaft diameter	
D1	D2					C _r [kN]	C _{0r} [kN]			[kg]		d [mm]	
24,6	-	PF203	US201			9,55	4,78			0,2		12	
-	28,6	PF203	ES201			9,55	4,78			0,2			
24,6	-	PF203	US202			9,55	4,78			0,2		15	
-	28,6	PF203	ES202			9,55	4,78			0,2			
24,6	-	PF203	US203			9,55	4,78			0,2		17	
-	28,6	PF203	ES203			9,55	4,78			0,2			
29,0	-	PF204	US204			12,80	6,65			0,3		20	
-	33,3	PF204	ES204			12,80	6,65			0,3			
34,0	-	PF205	US205			14,00	7,88			0,4		25	
-	38,1	PF205	ES205			14,00	7,88			0,4			
40,3	-	PF206	US206			19,50	11,20			0,7		30	
-	44,5	PF206	ES206			19,50	11,20			0,7			
48,0	-	PF207	US207			25,70	15,20			0,9		35	
-	55,6	PF207	ES207			25,70	15,20			1,0			
53,0	-	PF208	US208			29,60	18,20			1,5		40	
-	60,3	PF208	ES208			29,60	18,20			1,6			
57,2	-	PF209	US209			31,85	20,80			1,7		45	
-	63,5	PF209	ES209			31,85	20,80			1,7			
61,8	-	PF210	US210			35,10	23,20			1,8		50	
-	69,9	PF210	ES210			35,10	23,20			1,8			
69,0	-	PF211	US211			43,55	29,20			2,2		55	
-	76,2	PF211	ES211			43,55	29,20			2,0			
74,9	-	PF212	US212			52,50	32,80			2,4		60	
-	84,2	PF212	ES212			52,50	32,80			2,3			